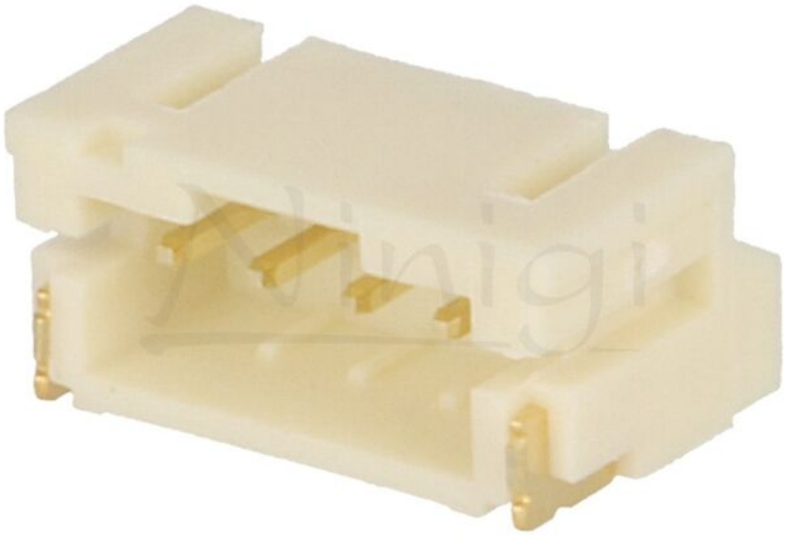


Symbol:	NXW-04SMDK
Product groups:	Raster signal connectors

Product specifications

Type of connector:	wire-board
Connector:	socket
Kind of connector:	male
Connector family:	data
Number of pins:	4
Enclosure material:	polyamide
Contacts pitch:	2mm
Maximum current:	1A
Contact plating:	tinned
Max. contact resistance::	20mΩ

Flammability rating:	UL94V-0
Max. operating voltage:	100V
Connector pinout layout:	1x4
Spatial orientation:	horizontal
Electrical mounting:	SMT
Width:	12mm
Operating temperature:	-25...85°C

Additional information

Gross weight:	0.001 kg