


Product card NXW-03SMD

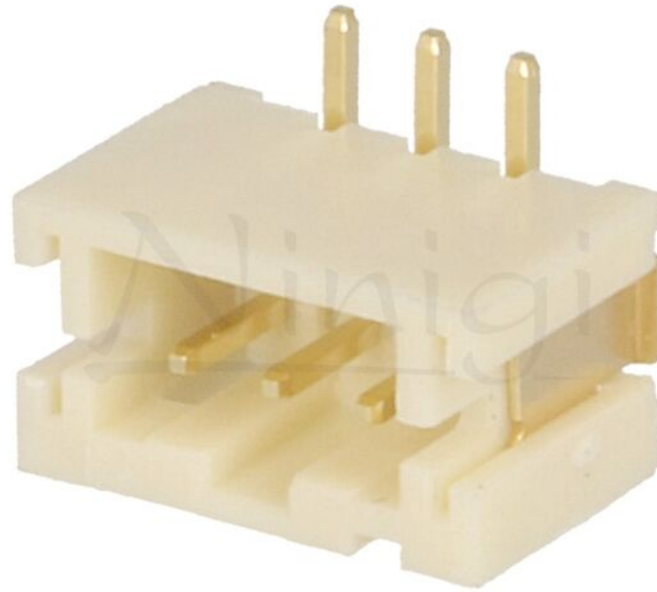

Symbol:	NXW-03SMD
Product groups:	Raster signal connectors

Product specifications

Type of connector:	wire-board
Connector:	socket
Kind of connector:	male
Number of pins:	3
Spatial orientation:	vertical
Electrical mounting:	SMT
Contacts pitch:	2mm
Connector pinout layout:	1x3
Contact plating:	tinned
Flammability rating:	UL94V-0

Product card NXW-03SMD

Maximum current:	1A
Max. operating voltage:	100V
Max. contact resistance::	20mΩ
Enclosure material:	polyamide
Width:	10mm
Operating temperature:	-25...85°C

Additional information

Gross weight:	0 kg
----------------------	------