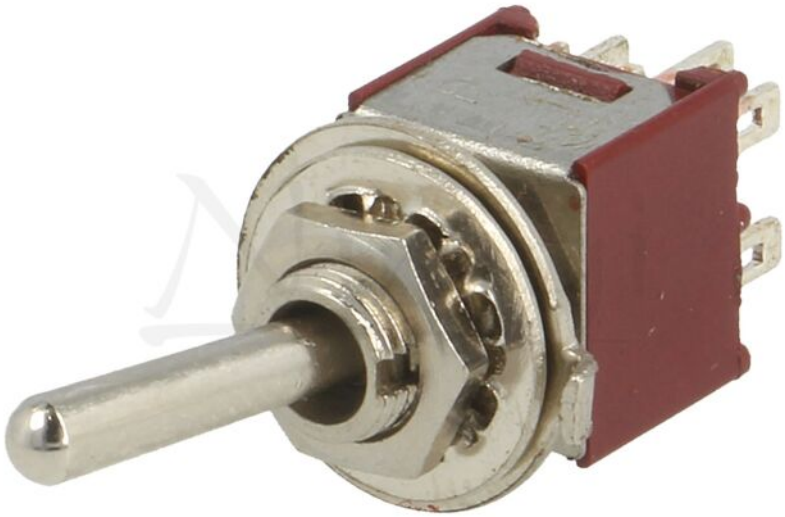


| | |
|---|---|
| **Symbol:** | TSSM2032A1 |
| **Product groups:** | Toggle Switches |

# Product specifications

| | |
|---|---|
| **Type of switch:** | toggle |
| **Number of positions:** | 3 |
| **Stable positions number:** | 3 |
| **Contacts configuration:** | DP3T |
| **Switching method:** | ON-OFF-ON |
| **AC contacts rating @R:** | 1A / 250V AC |
| **Leads:** | for soldering |
| **Operating temperature:** | -55...65°C |

| | |
|---|---|
| **Kind of toggle:** | round |
| **Mounting hole dimensions:** | Ø5mm |
| **Knob height:** | 9.4mm |
| **Max. contact resistance::** | 20mΩ |
| **Body dimensions:** | 8.3x9.2x8.6mm |
| **Electrical life:** | 20000 cycles |

# Additional information

| | |
|---|---|
| **Gross weight:** | 0.003 kg |