


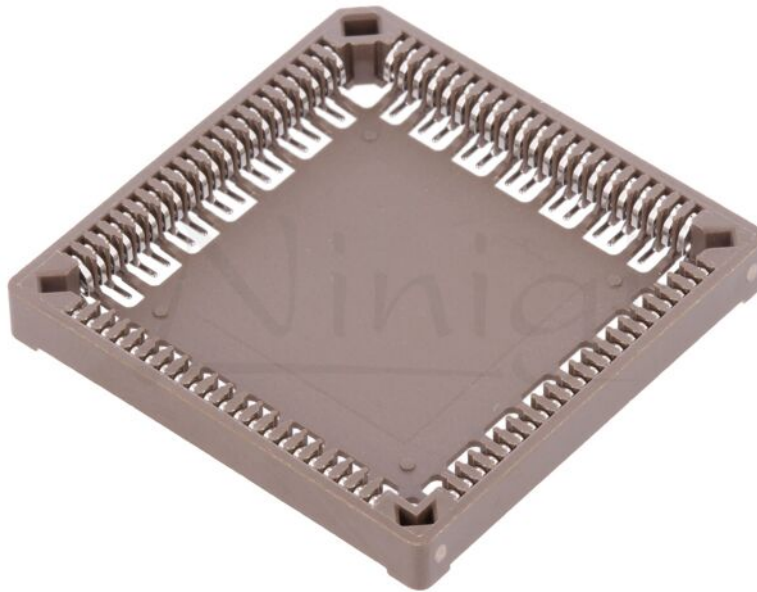

|                |            |
|----------------|------------|
| <b>Symbol:</b> | PLCC-84SMD |
|----------------|------------|

|                        |              |
|------------------------|--------------|
| <b>Product groups:</b> | PLCC sockets |
|------------------------|--------------|

## Product specifications

|                        |                     |
|------------------------|---------------------|
| <b>Type of Socket:</b> | integrated circuits |
|------------------------|---------------------|

|                     |        |
|---------------------|--------|
| <b>Application:</b> | PLCC84 |
|---------------------|--------|

|                             |     |
|-----------------------------|-----|
| <b>Electrical mounting:</b> | SMT |
|-----------------------------|-----|

|                          |                 |
|--------------------------|-----------------|
| <b>Contact material:</b> | phosphor bronze |
|--------------------------|-----------------|

|                         |        |
|-------------------------|--------|
| <b>Contact plating:</b> | tinned |
|-------------------------|--------|

|                                |    |
|--------------------------------|----|
| <b>Max. operating current:</b> | 1A |
|--------------------------------|----|

|                                  |      |
|----------------------------------|------|
| <b>Max. contact resistance::</b> | 30mΩ |
|----------------------------------|------|

|                             |         |
|-----------------------------|---------|
| <b>Mechanical mounting:</b> | on PCBs |
|-----------------------------|---------|

## Additional information

**Gross weight:**

0.003 kg