


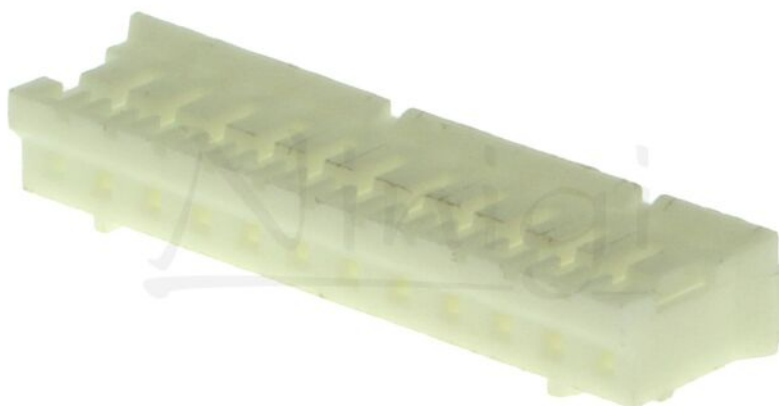

|                        |                          |
|------------------------|--------------------------|
| <b>Symbol:</b>         | NXG-12                   |
| <b>Product groups:</b> | Raster signal connectors |

## Product specifications

|                                 |            |
|---------------------------------|------------|
| <b>Type of connector:</b>       | wire-board |
| <b>Connector:</b>               | plug       |
| <b>Kind of connector:</b>       | female     |
| <b>Number of pins:</b>          | 12         |
| <b>Manufacturer series:</b>     | NXG        |
| <b>Mechanical mounting:</b>     | for cable  |
| <b>Contacts pitch:</b>          | 2mm        |
| <b>Connector pinout layout:</b> | 1x12       |
| <b>Flammability rating:</b>     | UL94V-0    |

|                                |              |
|--------------------------------|--------------|
| <b>Body material:</b>          | polyamide    |
| <b>Connector variant:</b>      | w/o contacts |
| <b>Max. operating voltage:</b> | 100V         |
| <b>Width:</b>                  | 25.8mm       |
| <b>A dimension:</b>            | 22mm         |
| <b>Operating temperature:</b>  | -25...85°C   |

## Additional information

|                      |      |
|----------------------|------|
| <b>Gross weight:</b> | 0 kg |
|----------------------|------|