


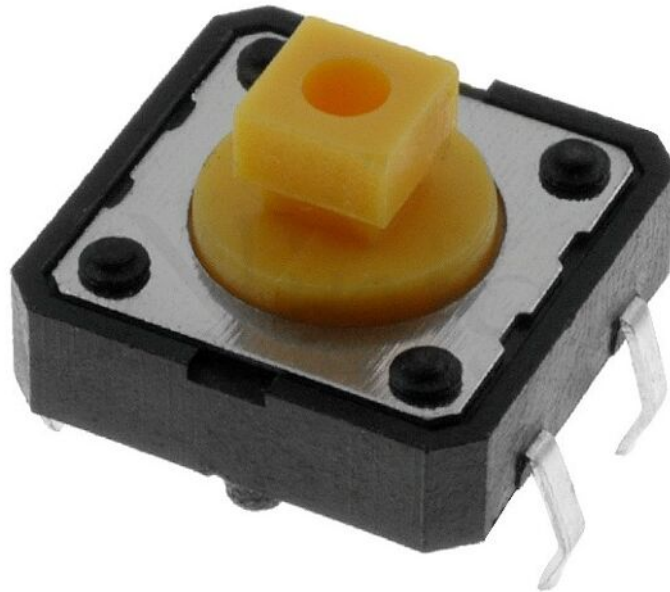

|                        |                    |
|------------------------|--------------------|
| <b>Symbol:</b>         | TACTS-24N-F        |
| <b>Product groups:</b> | Microswitches TACT |

## Product specifications

|                                 |                  |
|---------------------------------|------------------|
| <b>Type of switch:</b>          | microswitch TACT |
| <b>Contacts configuration:</b>  | SPST-NO          |
| <b>Number of positions:</b>     | 2                |
| <b>Stable positions number:</b> | 1                |
| <b>DC contacts rating @R:</b>   | 50mA / 12V DC    |
| <b>Mounting:</b>                | THT              |
| <b>Illumination:</b>            | none             |
| <b>Operating Force:</b>         | 1.57N            |

## Product card TACTS-24N-F

---

|                                    |                   |
|------------------------------------|-------------------|
| <b>Body dimensions:</b>            | 12x12mm           |
| <b>Button height:</b>              | 7.3mm             |
| <b>Switching method:</b>           | OFF-(ON)          |
| <b>Terminal pitch:</b>             | 5x12.5mm          |
| <b>Operating temperature:</b>      | -25...70°C        |
| <b>Button shape:</b>               | square            |
| <b>Actuator colour:</b>            | yellow            |
| <b>Button size:</b>                | 3.8x3.8mm         |
| <b>Leads:</b>                      | for PCB, straight |
| <b>Max. contact resistance::</b>   | 50mΩ              |
| <b>Min. insulation resistance:</b> | 0.1GΩ             |
| <b>Soldering temperature:</b>      | 250°C             |

## Additional information

|                      |          |
|----------------------|----------|
| <b>Gross weight:</b> | 0.001 kg |
|----------------------|----------|