


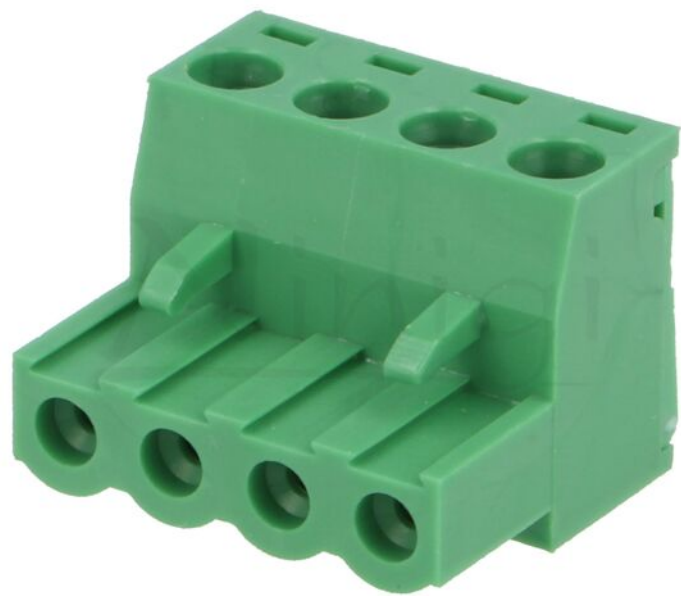

|                        |                 |
|------------------------|-----------------|
| <b>Symbol:</b>         | TBW-5-4P/GN     |
| <b>Product groups:</b> | Terminal blocks |

## Product specifications

|                             |                          |
|-----------------------------|--------------------------|
| <b>Type of connector:</b>   | pluggable terminal block |
| <b>Connector:</b>           | plug                     |
| <b>Kind of connector:</b>   | female                   |
| <b>Current rating:</b>      | 15A                      |
| <b>Rated voltage:</b>       | 0.3kV                    |
| <b>Spatial orientation:</b> | straight                 |
| <b>Mechanical mounting:</b> | for cable                |
| <b>Electrical mounting:</b> | screw terminal           |
| <b>Contact material:</b>    | brass                    |
| <b>Contact plating:</b>     | tinned                   |

|                                 |                    |
|---------------------------------|--------------------|
| <b>Colour:</b>                  | green              |
| <b>Flammability rating:</b>     | UL94V-0            |
| <b>Body material:</b>           | polyamide          |
| <b>Depth:</b>                   | 17.7mm             |
| <b>Length:</b>                  | 20.32mm            |
| <b>Connector pinout layout:</b> | 1x4                |
| <b>Wire cross-section:</b>      | 2.5mm <sup>2</sup> |
| <b>Contacts pitch:</b>          | 5.08mm             |
| <b>Number of ways:</b>          | 4                  |
| <b>Locking system:</b>          | latch              |
| <b>Number of terminals:</b>     | 4                  |
| <b>Height:</b>                  | 15.2mm             |
| <b>Stripped wire length:</b>    | 8mm                |
| <b>Operating temperature:</b>   | -40...105°C        |

## Additional information

|                      |          |
|----------------------|----------|
| <b>Gross weight:</b> | 0.006 kg |
|----------------------|----------|