


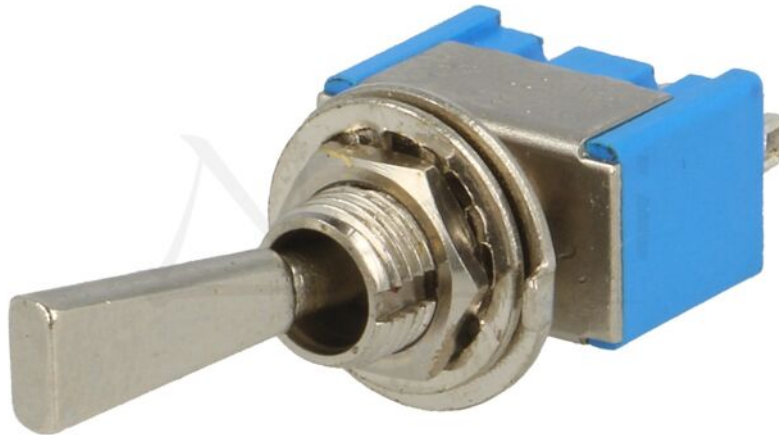

|                        |                 |
|------------------------|-----------------|
| <b>Symbol:</b>         | TSM102F1        |
| <b>Product groups:</b> | Toggle Switches |

## Product specifications

|                                 |               |
|---------------------------------|---------------|
| <b>Type of switch:</b>          | toggle        |
| <b>Number of positions:</b>     | 2             |
| <b>Stable positions number:</b> | 2             |
| <b>Contacts configuration:</b>  | SPDT          |
| <b>Switching method:</b>        | ON-ON         |
| <b>AC contacts rating @R:</b>   | 3A / 250V AC  |
| <b>Leads:</b>                   | for soldering |
| <b>Operating temperature:</b>   | -25...85°C    |

## Product card TSM102F1

---

|                                  |                |
|----------------------------------|----------------|
| <b>Kind of toggle:</b>           | flat           |
| <b>Mounting hole dimensions:</b> | Ø6.2mm         |
| <b>Knob height:</b>              | 11.5mm         |
| <b>Max. contact resistance::</b> | 20mΩ           |
| <b>Body dimensions:</b>          | 13.2x7.9x9.5mm |
| <b>Electrical life:</b>          | 20000 cycles   |
| <b>Actuator material:</b>        | metal          |
| <b>Body colour:</b>              | blue           |
| <b>Soldering temperature:</b>    | 260°C / 4 s    |
| <b>Thread:</b>                   | UNS1/4"-40     |

## Additional information

|                      |          |
|----------------------|----------|
| <b>Gross weight:</b> | 0.005 kg |
|----------------------|----------|