


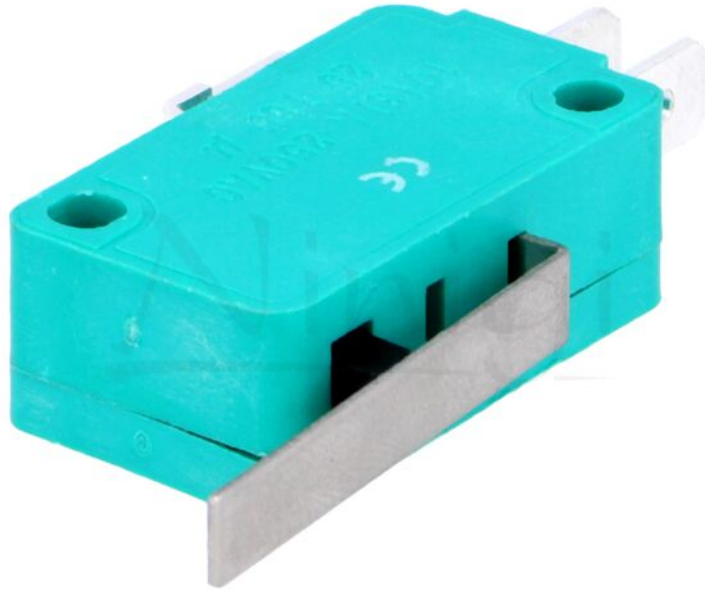

|                        |                           |
|------------------------|---------------------------|
| <b>Symbol:</b>         | WLK-2                     |
| <b>Product groups:</b> | Microswitches SNAP ACTION |

## Product specifications

|                                  |                         |
|----------------------------------|-------------------------|
| <b>Type of switch:</b>           | microswitch SNAP ACTION |
| <b>AC contacts rating @R:</b>    | 10A / 250V AC           |
| <b>Switches features:</b>        | with lever              |
| <b>Contacts configuration:</b>   | SPDT                    |
| <b>Max. contact resistance::</b> | 30mΩ                    |
| <b>Switching method:</b>         | ON-(ON)                 |
| <b>Number of positions:</b>      | 2                       |
| <b>Stable positions number:</b>  | 1                       |

|                                    |               |
|------------------------------------|---------------|
| <b>IP rating:</b>                  | IP40          |
| <b>Leads:</b>                      | connectors    |
| <b>Leads dimensions:</b>           | 4.8x0.5mm     |
| <b>Body dimensions:</b>            | 28x10.3x16mm  |
| <b>Operating temperature:</b>      | -25...80°C    |
| <b>Operating Force:</b>            | 1.6N          |
| <b>Lever length:</b>               | 27mm          |
| <b>Electrical life:</b>            | 100000 cycles |
| <b>Min. insulation resistance:</b> | 0.1GΩ         |

## Additional information

|                      |          |
|----------------------|----------|
| <b>Gross weight:</b> | 0.007 kg |
|----------------------|----------|