


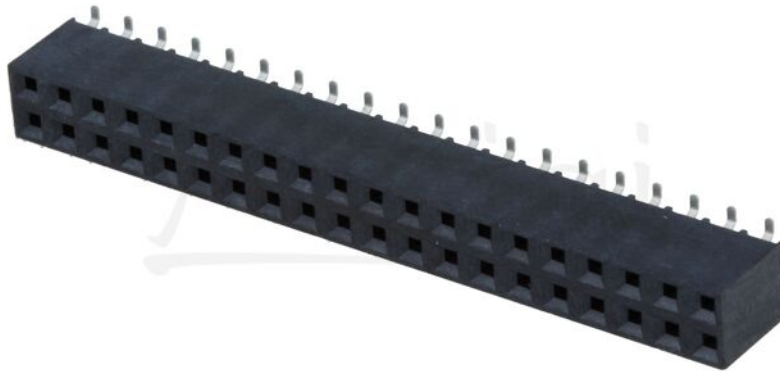

|                |            |
|----------------|------------|
| <b>Symbol:</b> | ZL264-40DG |
|----------------|------------|

|                        |             |
|------------------------|-------------|
| <b>Product groups:</b> | Pin headers |
|------------------------|-------------|

## Product specifications

|                                 |             |
|---------------------------------|-------------|
| <b>Type of connector:</b>       | pin strips  |
| <b>Connector:</b>               | socket      |
| <b>Kind of connector:</b>       | female      |
| <b>Number of pins:</b>          | 40          |
| <b>Electrical mounting:</b>     | SMT         |
| <b>Spatial orientation:</b>     | vertical    |
| <b>Contacts pitch:</b>          | 2.54mm      |
| <b>Connector pinout layout:</b> | 2x20        |
| <b>Contact plating:</b>         | gold-plated |

**Operating  
temperature:**

-55...105°C

## **Additional information**

**Gross weight:**

0.002 kg