


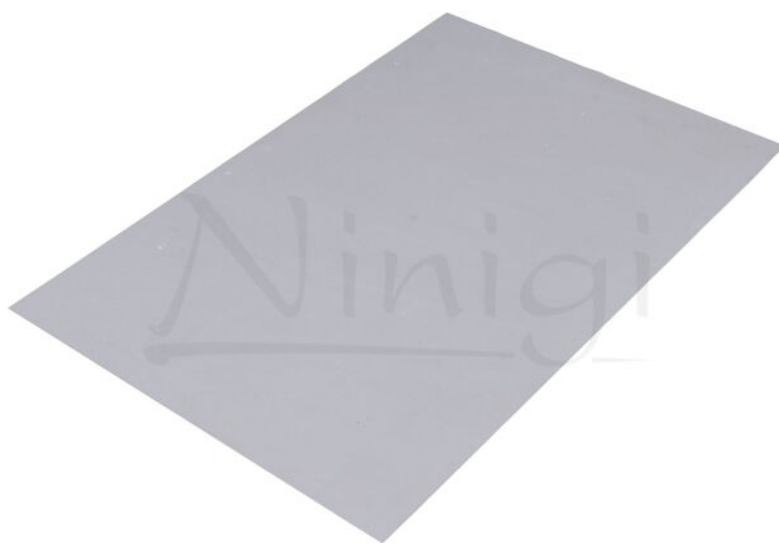

|                        |                       |
|------------------------|-----------------------|
| <b>Symbol:</b>         | SILI150X220           |
| <b>Product groups:</b> | Heatsinks - equipment |

## Product specifications

|                                   |                                  |
|-----------------------------------|----------------------------------|
| <b>Type of heat transfer pad:</b> | silicone caoutchouc              |
| <b>Length:</b>                    | 0.22m                            |
| <b>Width:</b>                     | 0.15m                            |
| <b>Thickness:</b>                 | 0.23mm                           |
| <b>Thermal conductivity:</b>      | 1W/mK                            |
| <b>Flammability rating:</b>       | UL94V-0                          |
| <b>Operating temperature:</b>     | -60...200°C                      |
| <b>Version:</b>                   | glass fiber reinforced, glueless |

**Min. breakdown  
voltage:**

5kV/mm

## **Additional information**

**Gross weight:**

0.012 kg