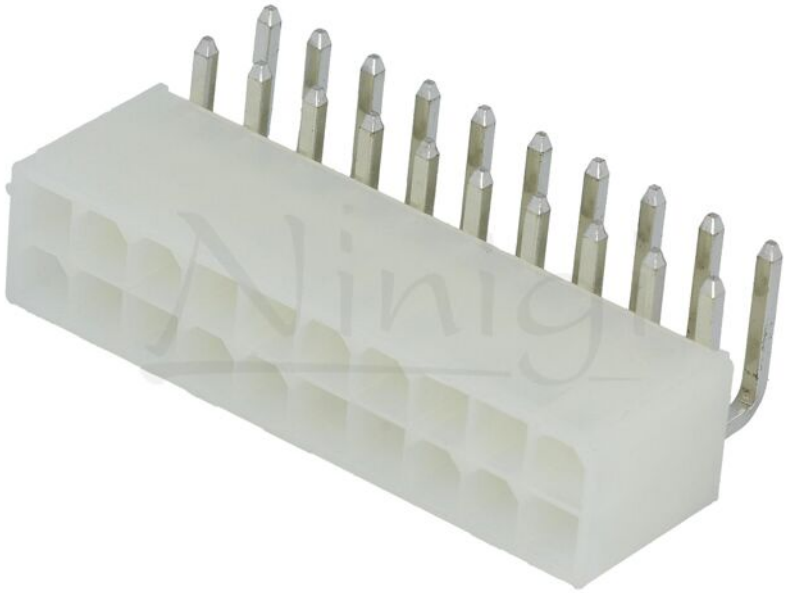


| | |
|---|---|
| **Symbol:** | N42GK-20 |
| **Product groups:** | Raster signal connectors |

# Product specifications

| | |
|---|---|
| **Type of connector:** | wire-board |
| **Connector:** | socket |
| **Kind of connector:** | male |
| **Connector family:** | data |
| **Manufacturer series:** | N42G |
| **Rated voltage:** | 0.6kV |
| **Number of pins:** | 20 |
| **Contacts pitch:** | 4.2mm |
| **Maximum current:** | 9A |
| **Contact plating:** | tinned |

| | |
|---|---|
| **Flammability rating:** | UL94V-2 |
| **Locking system:** | latch |
| **Connector pinout layout:** | 2x10 |
| **Spatial orientation:** | angled 90° |
| **Electrical mounting:** | THT |

# Additional information

| | |
|---|---|
| **Gross weight:** | 0.007 kg |