


Product card NXW-05SMD

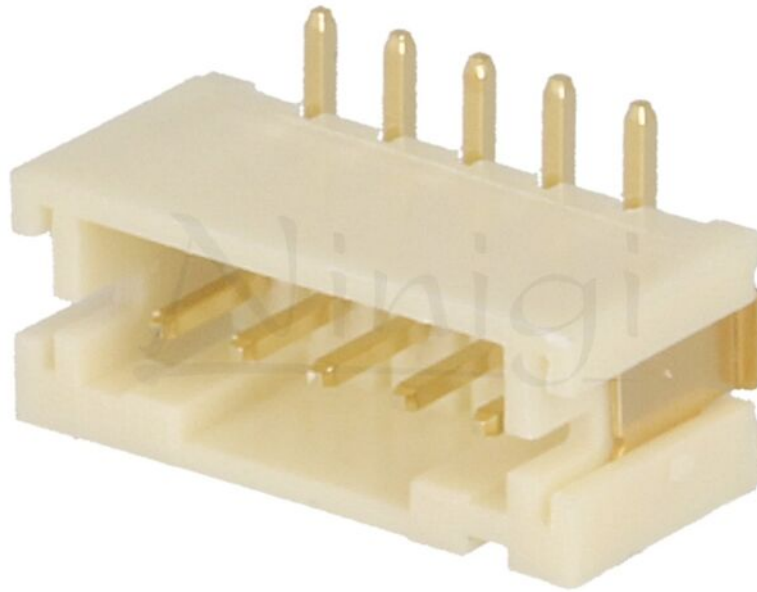

| | |
|------------------------|--------------------------|
| Symbol: | NXW-05SMD |
| Product groups: | Raster signal connectors |

Product specifications

| | |
|---------------------------------|------------|
| Type of connector: | wire-board |
| Connector: | socket |
| Kind of connector: | male |
| Number of pins: | 5 |
| Spatial orientation: | vertical |
| Electrical mounting: | SMT |
| Contacts pitch: | 2mm |
| Connector pinout layout: | 1x5 |
| Contact plating: | tinned |
| Flammability rating: | UL94V-0 |

Product card NXW-05SMD

| | |
|----------------------------------|------------|
| Maximum current: | 1A |
| Max. operating voltage: | 100V |
| Max. contact resistance:: | 20mΩ |
| Enclosure material: | polyamide |
| Width: | 14mm |
| Operating temperature: | -25...85°C |

Additional information

| | |
|----------------------|----------|
| Gross weight: | 0.001 kg |
|----------------------|----------|