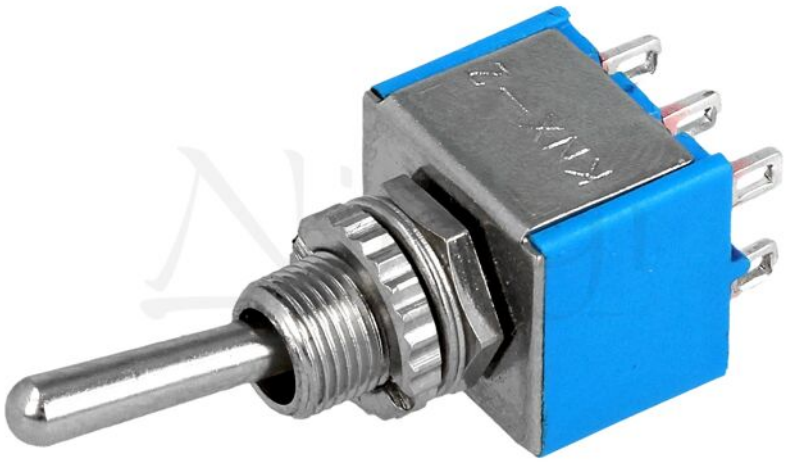


| | |
|---|---|
| **Symbol:** | TSX103 |
| **Product groups:** | Toggle Switches |

# Product specifications

| | |
|---|---|
| **Type of switch:** | toggle |
| **Number of positions:** | 2 |
| **Stable positions number:** | 2 |
| **Contacts configuration:** | DPDT |
| **Switching method:** | ON-ON |
| **AC contacts rating @R:** | 3A / 250V AC |
| **Leads:** | for soldering |
| **Operating temperature:** | -55...85°C |

| | |
|---|---|
| **Kind of toggle:** | round |
| **Mounting hole dimensions:** | Ø6mm |
| **Knob height:** | 11mm |
| **Max. contact resistance::** | 20mΩ |
| **Body dimensions:** | 12.5x11.5x9.5mm |
| **Electrical life:** | 20000 cycles |
| **Actuator material:** | metal |
| **Related items:** | TSX-CAP-RED |

# Additional information

| | |
|---|---|
| **Gross weight:** | 0.005 kg |